



## TurboSmartPump II

### The pump series for flexible metering tasks


The TurboSmartPump II is the consistently enhanced version of a tried-and-trusted Ecolab pump. For example, improvements such as externally accessible metering volume settings, a metering stroke indicator, and optimised setting accuracy in the lower dispensing range have been implemented.

Thanks to the new housing concept with frontal arrangement of the pump head, the design is extremely compact. Using the U-connector included in the scope of supply, several pumps can be mounted, thus saving space in the array.

- ▲ Stepper motor technology
- ▲ Short suction stroke and long metering stroke configurable
- ▲ Metering volume setting in range 1: 50
- ▲ Low-pulsation metering
- ▲ Various intake speeds selectable, depending on the product viscosity
- ▲ Space-saving manifold setup possible thanks to lean design
- ▲ Power supply 24 V DC or 230 V AC (option)



## Structure


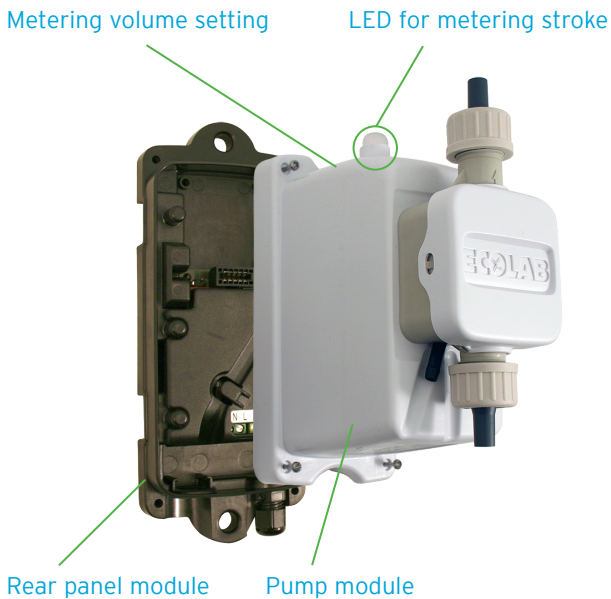


Jumper for adjusting the different metering modes

- standard metering mode
- mode for medium viscosities
- mode for high-viscosity products



## Manifold setup

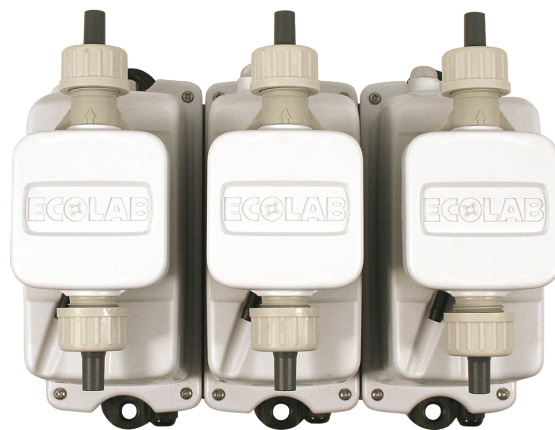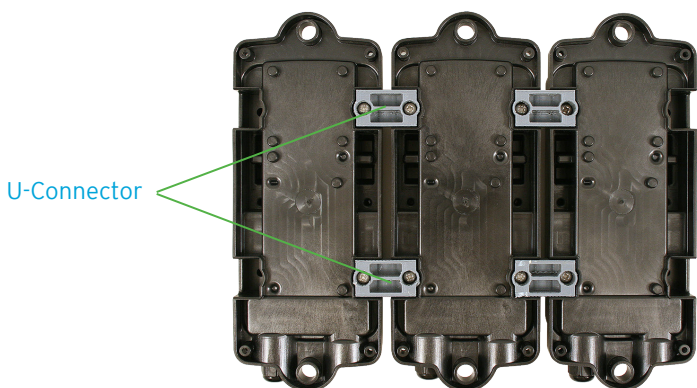

## Technical data

Description:	Value:
Pump capacity	0.4 to 20 l/h
Max. metering back-pressure	0.2 MPa (2 bar)
Max. suction height	1.5 m (Ws)
Ambient temperature	15 - 40 °C
Connection	G 5/8 for hose
Power supply	24 V, DC 240 V, 50/60 Hz (option)
Safety type	IP 52
Weight	approx. 1.3 kg

Ecolab Engineering GmbH  
 Postfach 1164 83309 Siegsdorf  
 Tel. +49 8662 61 0  
 engineering-mailbox@ecolab.com  
 www.ecolab-engineering.de

